




Pressure Transmitter HDA 4700 shipping applications

Relative pressure Accuracy 0.25 %



Description:

This pressure transmitter has been specially developed for shipbuilding applications and is based on the HDA 4000 series.

The HDA 4700 is designed to measure relative pressures in the high pressure range by means of its sensor measurement cell with thin-film strain gauge on a stainless steel membrane.

The evaluation electronics converts the measured pressure into a proportional analogue signal of 4 .. 20 mA.

The electronic module is completely potted to protect it against humidity, vibrations and shock, and is enclosed in a solid stainless steel housing.

For use in the shipping industry, these pressure transmitters have been approved by the following organisations.

Approvals:

- American Bureau of Shipping
- Lloyds Register of Ships
- Det Norske Veritas/ Germanischer Lloyd
- Bureau Veritas



Other approvals on request

Technical data:

Input data											
Measuring ranges	bar	6	16	40	60	100	250	400	600	1000 ¹⁾	1600 ¹⁾
Overload pressures	bar	15	32	80	120	200	500	800	1000	1600	2400
Burst pressure	bar	100	200	200	300	500	1000	2000	2000	3000	3000
Mechanical connection	G1/4 A ISO 1179-2 G1/2 B DIN EN 837										
Tightening torque, recommended	20 Nm (G1/4), 45 Nm (G1/2)										
Parts in contact with fluid	Mech. connection: Stainless steel Seal: FKM										
Output data											
Output signal, permitted load resistance	4 .. 20 mA, 2-conductor $R_{Lmax} = (U_B - 10 \text{ V}) / 20 \text{ mA} \text{ [k}\Omega\text{]}$										
Accuracy acc. to DIN 16086, terminal based	$\leq \pm 0.25 \%$ FS typ. $\leq \pm 0.5 \%$ FS max.										
Accuracy, B.F.S.L.	$\leq \pm 0.15 \%$ FS typ. $\leq \pm 0.25 \%$ FS max.										
Temperature compensation	$\leq \pm 0.008 \%$ FS / °C typ.										
Zero point	$\leq \pm 0.015 \%$ FS / °C max.										
Temperature compensation	$\leq \pm 0.008 \%$ FS / °C typ.										
Span	$\leq \pm 0.015 \%$ FS / °C max.										
Non-linearity acc. to DIN 16086, terminal based	$\leq \pm 0.3 \%$ FS max.										
Hysteresis	$\leq \pm 0.1 \%$ FS max.										
Repeatability	$\leq \pm 0.05 \%$ FS										
Rise time	$\leq 1 \text{ ms}$										
Long-term drift	$\leq \pm 0.1 \%$ FS typ. / year										
Environmental conditions											
Compensated temperature range	-25 .. +85 °C										
Operating temperature range ²⁾	-40 .. +85 °C / -25 .. +85 °C										
Storage temperature range	-40 .. +100 °C										
Fluid temperature range ²⁾	-40 .. +100 °C / -25 .. +100 °C										
CE mark	EN 61000-6-1 / 2 / 3 / 4										
Vibration resistance acc. to DIN EN 60068-2-6 at 5 .. 500 Hz	$\leq 20 \text{ g}$										
Protection class acc. to DIN EN 60529 ³⁾	IP 67										
Other data											
Supply voltage	10 .. 32 V DC										
Residual ripple of supply voltage	$\leq 5 \%$										
Life expectancy ⁴⁾	$> 10 \text{ million cycles, } 0 .. 100 \%$ FS										
Weight	$\sim 150 \text{ g}$										

Note: Reverse polarity protection of the supply voltage, excess voltage, override and short circuit protection are provided.

FS (Full Scale) = relative to complete measuring range
B.F.S.L. = Best Fit Straight Line


¹⁾ Measuring ranges: approval for Lloyds Register on request, 1000 bar and above only with connection G 1/2 B DIN EN 837

²⁾ -25 °C with FKM seal, -40 °C on request

³⁾ With mounted mating connector in corresponding protection class


⁴⁾ Measuring ranges $\geq 1000 \text{ bar}$: $> 1 \text{ million cycles } (0 .. 100 \%$ FS)

Dimensions:

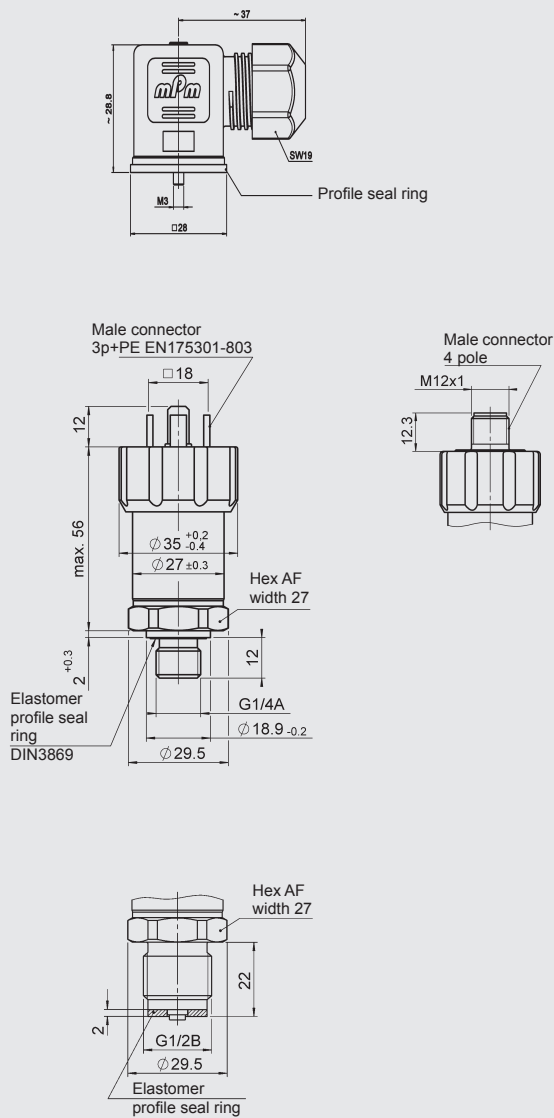


Pin connections:

EN175301-803



Pin	HDA 47X5-A
1	Signal +
2	Signal -
3	n.c.
L	Housing

M12x1



Pin	HDA 47X6-A
1	Signal +
2	n.c.
3	Signal -
4	n.c.

Model code:

HDA 4 7 X X - A - XXXX - S00

Mechanical connection

- 1 = G1/2 B DIN EN 837
- 4 = G1/4 A ISO 1179-2

Electrical connection

- 5 = male, EN175301-803, 3 pole + PE (IP 67 mating connector supplied)
- 6 = male M12x1, 4 pole (mating connector not supplied)

Output signal

- A = 4 .. 20 mA, 2-conductor

Measuring ranges in bar

0006; 0016; 0040; 0060; 0100; 0250; 0400; 0600
1000; 1600 bar (only with mech. connection code "1")

Modification number

S00 = with approvals for shipping

Accessories:

Appropriate accessories, such as mating connectors, can be found in the Accessories brochure.

Note:

The information in this brochure relates to the operating conditions and applications described.

For applications or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

HYDAC ELECTRONIC GMBH
Hauptstr. 27, 66128 Saarbrücken
Germany
Telephone +49 (0)6897 509-01
Fax +49 (0)6897 509-1726
e-mail: electronic@hydac.com
Internet: www.hydac.com